

Pivot Hinge



Patent

30kg OK



33-36mm

This hinge is fixed in the top and bottom of the door. The design is slim, so it doesn't interfere with the design of the door. Once the bottom part is fixed, the upper part is easily set by pulling down the upper pin and put it back in place. Once installed, the front-back, right-left, up-down adjustment can be made easily using a screwdriver. This type of hinge is very durable as it has passed 200,000 operation tests, and it is also available in four high-quality finishing colors.






Material: (Main unit)Steel, ZDC (Cover)Resin
Load Capacity:30kg(294N)
Recommended Door Thickness:33mm
Adjusting Range:Front-Back±2, Left-Right±2
Up-Down+2mm, -4mm

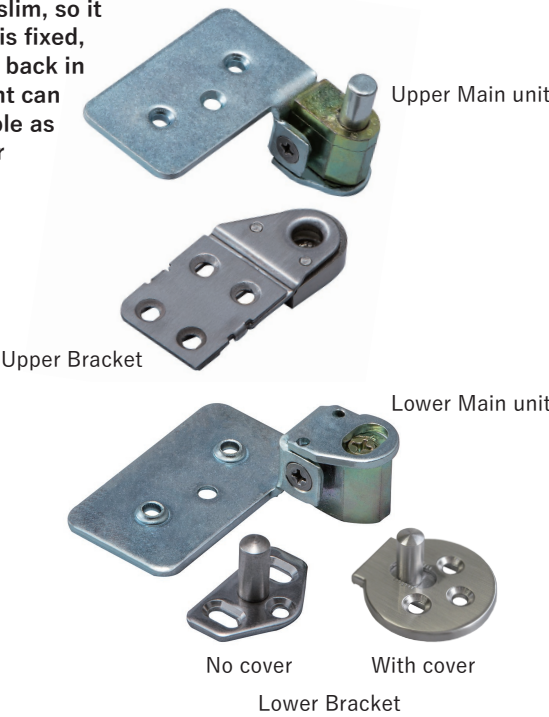

Pivot Hinge			
Product No.			
LH	RH	Lower Bracket	Finish/Color
215011	215015	No cover	Gold Painting
215012	215016		Silver Painting
215013	215017		Satin Silver
215014	215018		Chrome Plating
215011N	215015N	With cover	Gold Painting
215012N	215016N		Silver Painting
215013N	215017N		Satin Silver
215014N	215018N		Chrome Plating
Screw included:			
〈Upper Bracket〉		3.5×25 Flat head tapping screw 4pcs	
〈Lower Bracket〉		3.5×25 Flat head wood screw 3pcs	
〈Main unit〉		3.5×30 Flat head tapping screw 6pcs	

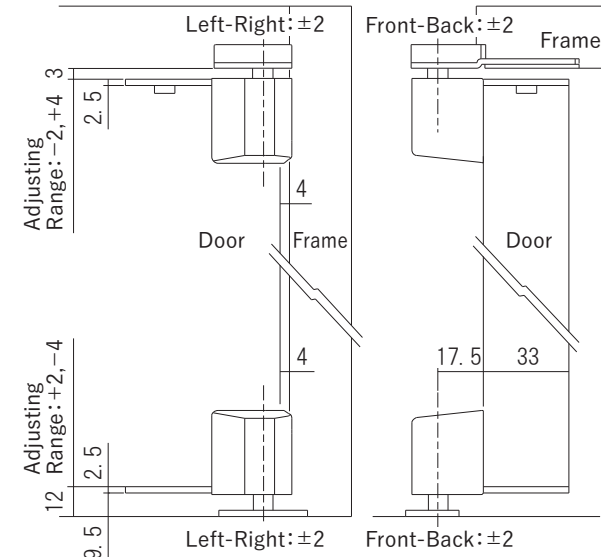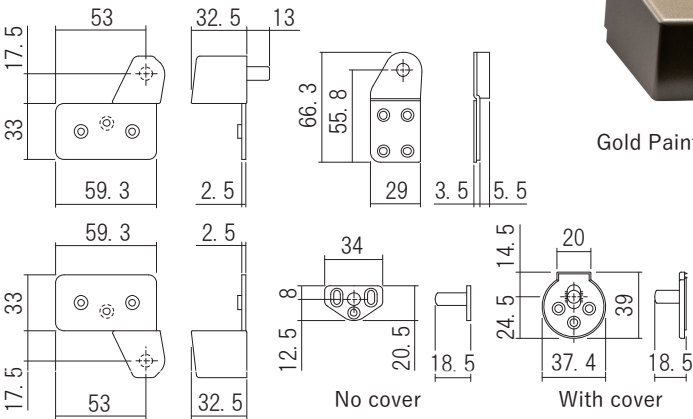

Drawing for Installation (Drawing for Right-Hand)
※ Digging is necessary on door and frame.



Butt Hinge




This standard type hinge consists of knuckles and leaves. The leaves use high-strength steel, and the hinge itself has passed 200,000 operation tests. Thus, this hinge has excellent strength and durability. In addition, the installation can be done easily as the leaves can be removed and then attached to the door and frame separately. The knuckles are also easy to insert and remove to ease the fixing process.

Material:Steel
Load Capacity:30kg(294N)_When using 2pcs

Butt Hinge		
Product No.		
Left-Hand	Right-Hand	Finish/Color
201021	201011	Silver Painting
201022	201012	Amber Painting
201023	201013	Gold Painting

Screw included: 4×25 Flat head tapping screw 10pcs

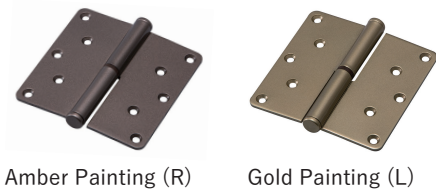

Lift Off Hinge



This flag hinge uses high-strength steel for the leaves part, and the hinge itself has passed 200,000 operation tests. Thus, this hinge has excellent strength and durability. In addition, the installation can be done easily as the leaves can be removed and then attached to the door and frame separately. The knuckles are also easy to insert and remove to ease the fixing process.

Material:Steel
Load Capacity:30kg(294N)_When using 2pcs

Lift Off Hinge		
Product No.		
Left-Hand	Right-Hand	Finish/Color
201222	201212	Amber Painting
201223	201213	Gold Painting

Screw included: 4×25 Flat head tapping screw 8pcs



Stainless Lift Off Hinge



The leaves of this flag hinge uses SUS 304 with excellent resistance to corrosion and rust. Also, the hinge itself has passed 200,000 operation tests. Thus, this hinge has excellent durability. The installation can be done easily as the leaves can be removed and then attached to the door and frame separately. The knuckles are also easy to insert and remove to ease the fixing process.

Material:Stainless
Load Capacity:30kg(294N)_When using 2pcs

Stainless Lift Off Hinge		
Product No.		
Left-Hand	Right-Hand	Finish/Color
201521	201511	Raw Material
201522	201512	Amber Painting
201523	201513	Gold Painting

Screw included: 4×25 Flat head tapping screw 8pcs

