

KT Adjustable Roller





Using this device, adjusting the sliding door position to maintain a smooth operation is possible as, over time, the door will slightly change due to weather and friction.

Material: Resin, Steel
Load Capacity: 30kg(294N)
Installation Range:
Upper_Left-Right ± 2mm
Lower_Up-Down ± 3mm, Left-Right ± 2mm
Appropriate Rail: Upper_Lintel Rail, Lower_T Rail

KT Adjustable Roller

Product No.	Specification	Finish/Color
301332	Upper side	Amber
301342	Lower side	

※ 1 pc price.
Screw included:
4 × 30 Flat head tapping screw 1pcs

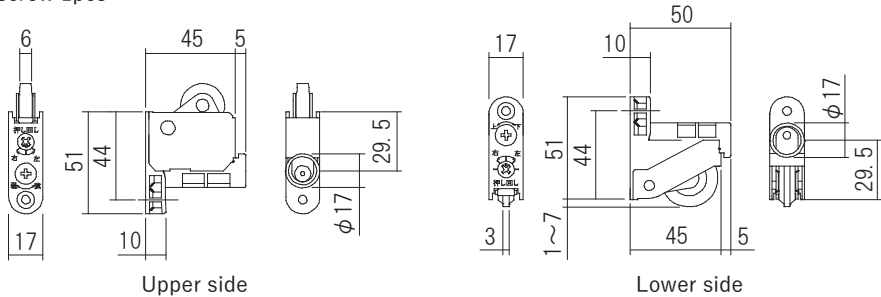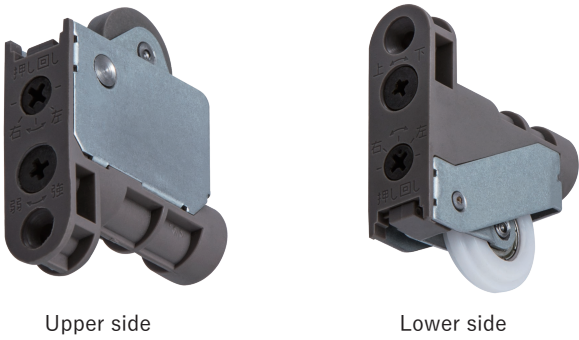

T Floor Rail





This rail is used together with the lower KT Adjusting Roller. As the height of the rail is only 3 mm, this product is barrier-free.

Material: Aluminum
Load Capacity: 30kg(294N)

T Floor Rail

Product No.	Specification	Length (mm)
310361A	Single Rail	1,820
310361B		2,730
310361C		3,640
310362A	Double Rails	1,820
310362B		2,730
310362C		3,640
310363A	Triple Rails	1,820
310363B		2,730
310363C		3,640

Screw included:
2.7 × 16 Flat head wood screw
(The number depends on the rail length.)

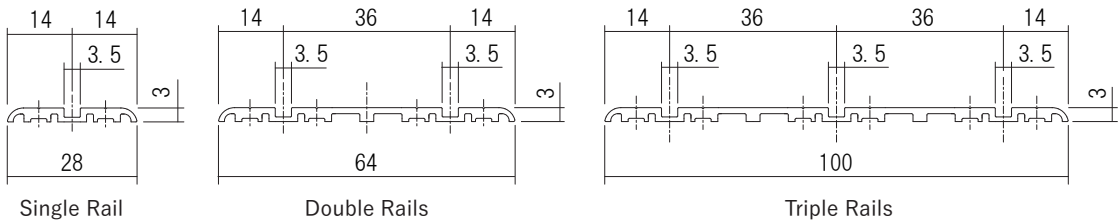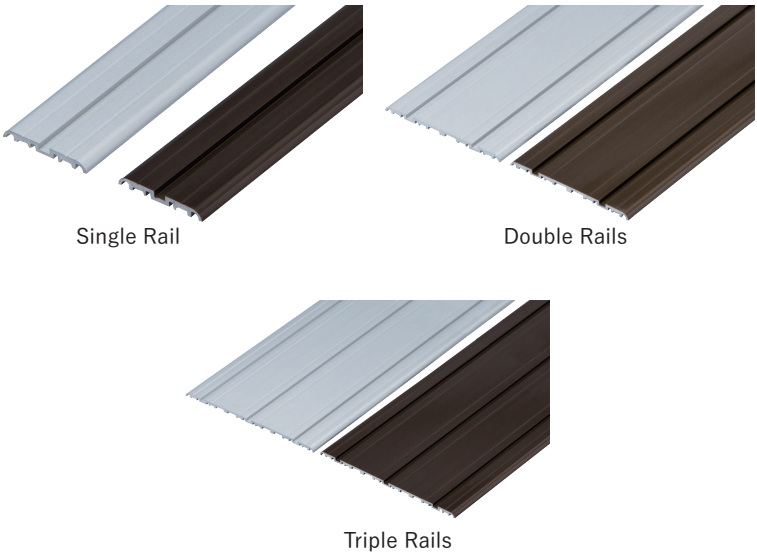

Lintel Rail



Material: Aluminum
Finish/Color: Amber

Lintel Rail

Product No.	Specification	Length (mm)
310312A	Single Rail	1,820
310312B		2,730
310312C		3,640
310412A	Double Rails	1,820
310412B		2,730
310412C		3,640

Screw included:
3.5 × 12 Flat head tapping screw
(The number depends on the rail length.)

