

KT Adjusting Roller Door




In addition to the up-down Adjusting, this door roller can adjust frictions according to the door shape and frame shape changed.

Material: Resin, Steel
Load Capacity: 294N(30kg)
Installation Range: Up-Down ± 3mm, Left-Right ± 2mm
Appropriate Rail: Upper_Lintel Rail, Lower_T Rail

KT Adjusting Roller Door


Product No.	Specification	Finish/Color
301-332	Upper side	Amber
301-342	Lower side	

※ 1 pc price.
Screw included:
4 × 30 Flat head tapping screw 1pcs

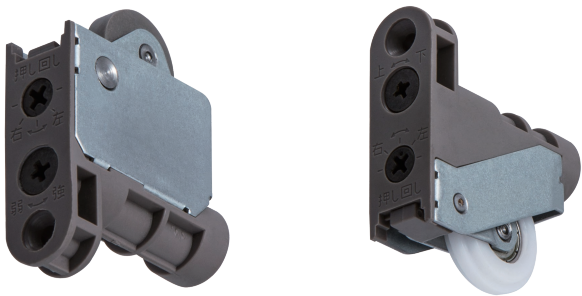

Upper side

Lower side

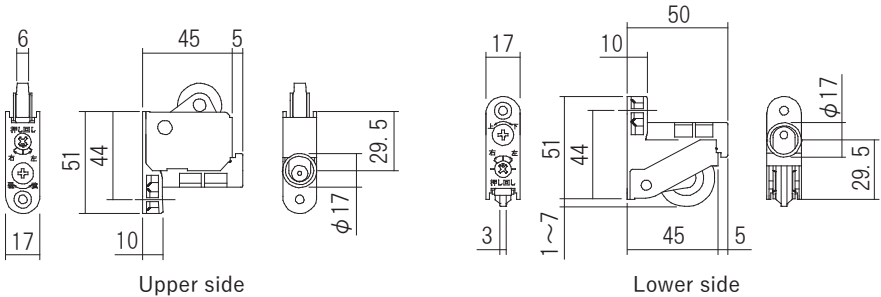

Upper side

Lower side

Lintel Rail




Material: Aluminum
Finish/Color: Amber

Lintel Rail


Product No.	Specification	Length (mm)
310-312A	Single Rail	1,820
310-312B		2,730
310-312C		3,640
310-412A	Double Rails	1,820
310-412B		2,730
310-412C		3,640

Screw included:
3.5 × 12 Flat head tapping screw
(The number depends on the rail length.)

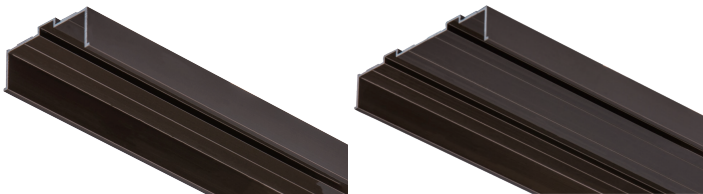

Single Rail

Double Rails

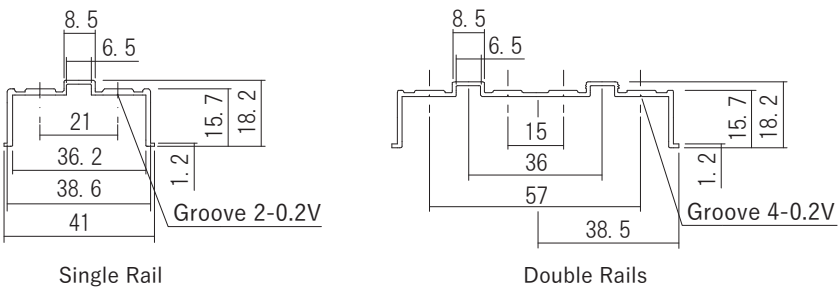

Single Rail

Double Rails

T Floor Rail




This Rail used for lower KT Adjusting Roller. It only has 3mm height and it is barrier free.

Material: Aluminum
Load Capacity: 294N(30kg)

T Floor Rail

Product No.	Amber	Silver	Specification	Length (mm)
310-361A	310-364A		Single Rail	1,820
310-361B	310-364B			2,730
310-361C	310-364C			3,640
310-362A	310-365A		Double Rails	1,820
310-362B	310-365B			2,730
310-362C	310-365C			3,640
310-363A	310-366A		Triple Rails	1,820
310-363B	310-366B			2,730
310-363C	310-366C			3,640


Screw included:
2.7 × 16 Flat head wood screw
(The number depends on the rail length.)

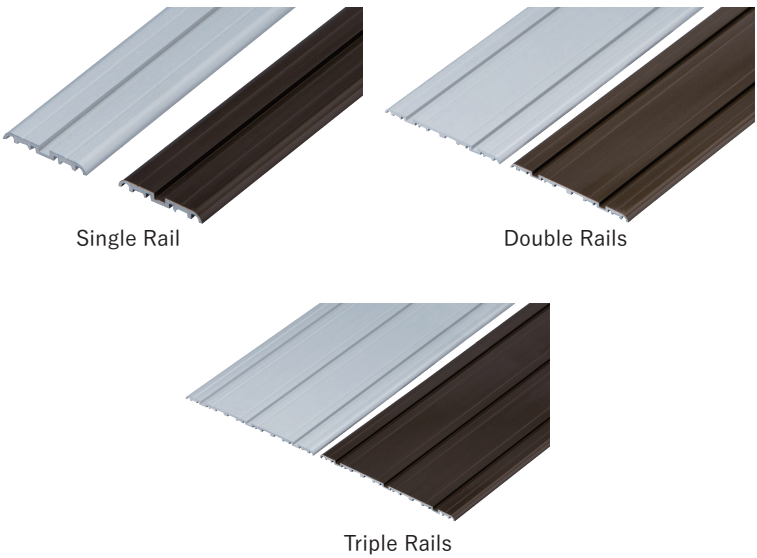

Single Rail

Double Rails

Triple Rails

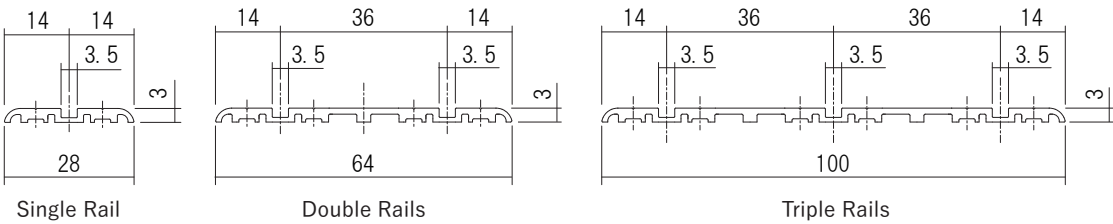

Single Rail

Double Rails

Triple Rails

