

Clear Cut Hook Lock (Square)



It is easy to lock and unlock the door just by turning a thumb turn.  
Privacy lock・Indicator lock can be unlocked from the outside in an emergency situation.  
There are 100 patterns of keys for cylinder type.

Material: 〈Rose, Lever〉ZDC  
          〈Lock Case, Strike〉Stainless, Steel  
Door Thickness: 30~40mm  
Strike Installation Range: Up-Down ± 5mm, Depth 2.5mm

Clear Cut Hook Lock (Square)				
Product No.	Key Spesification			
BS38	BS51	Inside	Outside	Finish/Color
224-302K	224-522K	Standard	Privacy	Satin Silver
224-332K	224-526K	type	lock	Black Painting
224-307K	224-532K	Standard	Indicator	Satin Silver
224-331K	224-536K	type	lock	Black Painting
224-312K	224-542K	Standard	Cylinde	Satin Silver
224-333K	224-546K	type	lock ※1	Black Painting
224-586	224-579	Lock Case(Front round type)		
224-580	224-580	Adjustment Strike(Front round type)		
244-587	900-021	Lock Case(Front square type)		
900-022	900-022	Adjustment Strike(Front square type)		
224-581	224-581	Spare key (No.000)		
224-582	224-582	Spare key (No.B000)		
224-583	224-583	Spare key (No.D000)		

Screw included:  
〈Rose〉  
Refer to the Rose fixing screw / Spindle specification table.  
〈Lock case〉  
3.5×20 Flat head tapping screw(D7) 2pcs  
〈Strike〉  
3.5×20 Flat head tapping screw(D7) 2pcs

- ※1 With 2 keys.
- ※ Both sides of the door can use Thumb turn.
- ※ The front of case and strike are standard type, Lever type specification is round shape.  
UD lever specification is square shape. (They are Changeable.)
- ※ The finish of the front of the Lock Case and the Strike is Barrel Polishing.
- ※ Please contact us about the purchasing of master keys.

Rose fixing screw / Spindle specification table

Indicator, Privaci lock			
Door thickness (mm)	30~34	35~39	40
Rose fixing screw	M4 × 16		M4 × 25
Spindle	L27	L32	L37.5


Cylinder lock			
Door thickness (mm)	30~35	36~39	40
Rose fixing screw	M4 × 16		M4 × 25
Spindle length (only spindle)	L21(17.8)	L27(23.8)	

Two sides Thumb-turn			
Door thickness (mm)	30~34	35~39	40
Rose fixing screw	M4 × 10	M4 × 16	M4 × 20
Spindle	L27	L32	L37.5




Square type  
Round type  
Adjustment Strike

Clear Cut Hook Lock  
(Indicator lock)

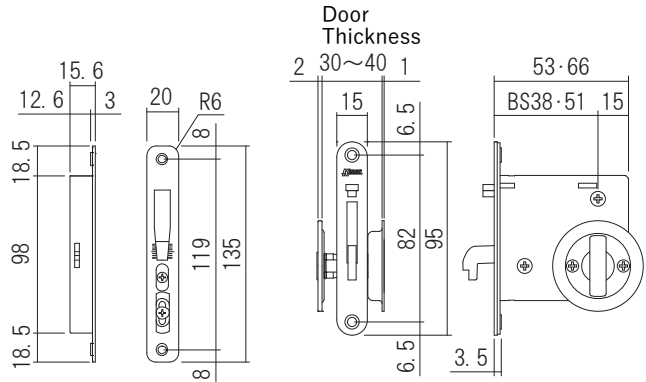

Adjustment Strike

Clear Cut Hook Lock

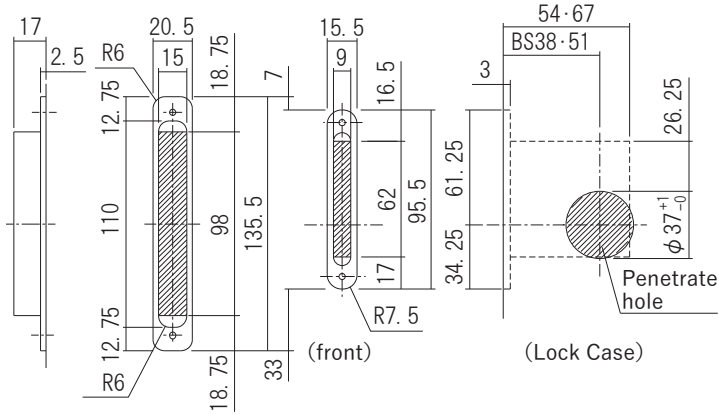

Strike digging drawing

Lock Case digging drawing




Indicator lock (Outdoor side)



Standard type (Indoor side)



Satin Silver  
Black Painting  
Privacy lock

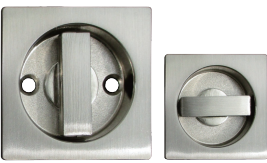

Satin Silver



Satin Silver  
Black Painting  
Indicator lock



Black Painting



Satin Silver  
Black Painting  
Cylinder lock

