**Euro Series** 



#### **Mortice Locks**

This mortice lock conforms to DIN18251 and EN12209:2003/AC2005. It can be used on fire rated door and the fire rated period is effective for more than 2 hours.

Material: \(\lambda\) Ortice\(\rangle\) Steel, Stainless \(\lambda\) Strike\(\rangle\) Stainless \(\lambda\) Strike Pocket\(\rangle\) Resin

Backset:60mm

Durability Testing: 500,000 times Specification: EN12209, DIN18251

Mortice Lock	
Product No.	Specification
500-010	Sash lock
500-011	Night latch lock
500-012	Deadlock
500-013	Passage lock
500-014	Privacy lock
500-015	Classroom lock
500-016	Roller lock

Screw included:

 $4.8 \times 25$  Flat head tapping screw 2pcs  $4 \times 16$  Flat head tapping screw 3pcs

Parts included: Mortice Lock 1pcs Assembly screws 1set Strike 1pcs Strike Pocket 1pcs





Sash Lock















Privacy lock Classroom lock Roller lock

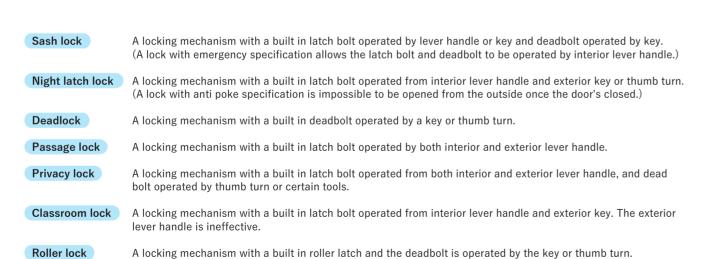

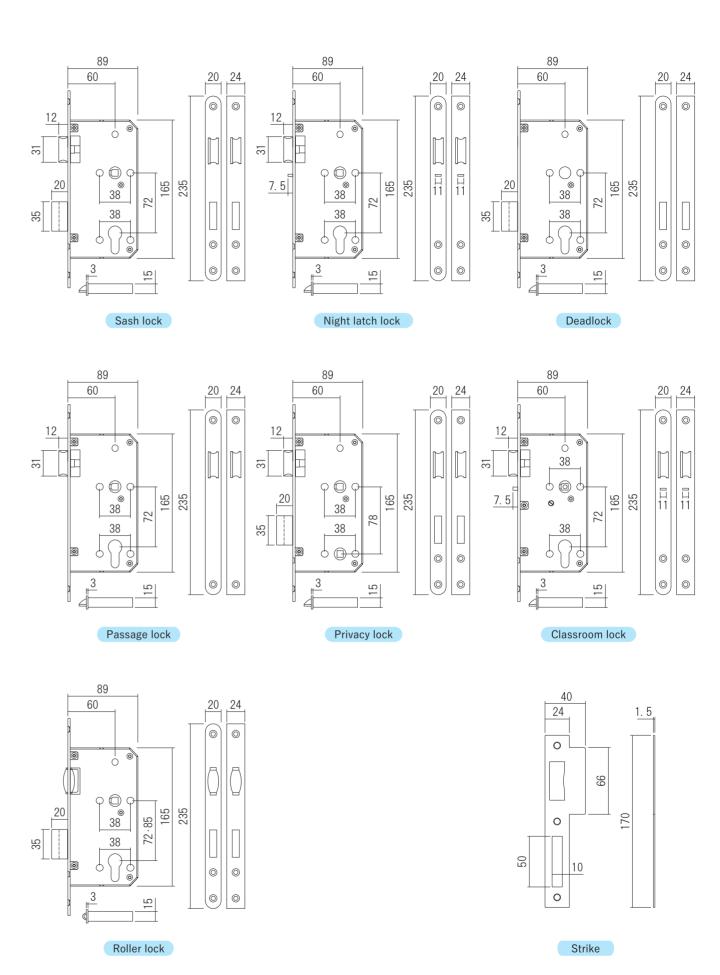



#### Fire-rated Handle


This lever handle is applicable on fire-rated door. The fire-rated period is 3 hours. Not only conforms to EN1634, but this lever also confirms to EN1906 and DIN18251.

Material: Stainless Finish/Color: Satin Finish Durability Testing: 200,000 times Fire-rated Testing period: 3 hours Specification: EN1906, DIN18251

Fire-rated Handle

rire-rateu manule	
Product No.	Model No.
500-030	LH8101
500-031	LH8103
Parts included:	

Fire-rated Handle 1pair Escutcheon 1pcs Assembly screws 1set Allenwrench 1pcs

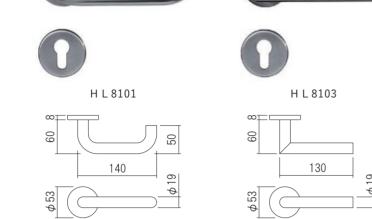




#### Standard Cylinder

This is a 6 pins-tumbler locking cylinder made of brass and the bottom pin is made of stainless steel.

Material: Brass, Stainless Finish/Color: Satin Nickel Durability Testing: 200,000 times Specification: EN1303:2005

Standard Cylinder Product No. 500-046 Parts included: Standard Cylinder 1pcs Brass key 5pcs Steel screw 1pcs

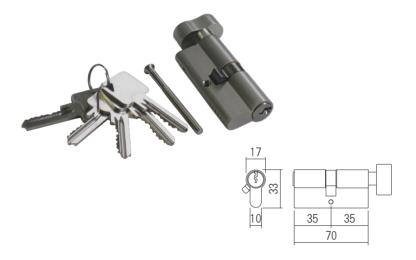



#### **Euro Profile Escutcheon**


Material: (Escutcheon) Stainless ⟨Base⟩Steel Finish/Color: Satin Finish


Euro Profile escutcheon
Product No.
500-045
Parts included:

Euro Profile escutcheon 1set










Satin Finish

Black

The number of hinges required		
Door height (mm)	Hinges Quantity	
Below 1523	2	
1524~2285	3	
2286~3048	4	

# Rectangular Flush Cover



Material: Stainless


Rectangular Recessed Pull		
Product No.	Finish/Color	
500-040	Satin Finish	
500-041	Black	
0 '		

Screw included:

4 × 12 Flat head machine screw(D7) 4pcs Parts included:

Rectangular Recessed Pull 1pcs Assembly screws 1set

up to operate the cylinder.









### **Euro Fire-rated Hinge**

This hinge is applicable on fire-rated door with a fire-rated period for 2 hours. This product not only conforms to EN1634, but it also confirms to EN1935:2002 Grade 13.

Material: Stainless Finish/Color: Raw Material

Euro fire-rated hinge			
Product No.	Size(mm)	Material	
500-000	$127 \times 76 \times t3$	SUS304	
500-001	$102 \times 76 \times t3$	SUS304	
500-002		SUS316	
500-003	$127 \times 89 \times t3$	SUS304	
500-004		SUS316	
Scrow include	۷.		

Screw included:  $4.5 \times 30$  Flat head tapping screw 8pcs Parts included: Euro fire-rated hinge 1pcs

Assembly screws 1set

_oad capacity table			
Hinge size (mm)	Load capacity (kg)	Door Width (	
$102\!\times\!76\!\times\!t3$	45	Below 850	

(mm) Below 900  $127 \times 76 \times t3$ 50~60 127×89×t3 50~60 Below 900

110 111 Material: Stainless Finish/Color: Satin Finish Fire-rated Testing Period: 2 hours

Extension Flush Bolt

Extension ridsh bort	
Product No.	Rod length(mm)
500-070	300
500-071	600
500-072	1,000
Screw included:	


〈Main unit〉

M5 × 12 Flat head machine screw 4pcs ⟨Strike⟩

M4 × 8 Flat head machine screw 4pcs Parts included:

Extension Flush Bolt 2pcs

Assembly screws 1set

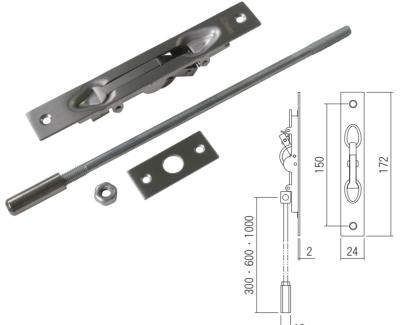

#### **Automatic Flush Bolt**

Material: Stainless Finish/Color: Satin Finish Fire-rated Testing Period: 2 hours

Automatic Flush Bolt

Product No. 500-073

Screw included:

3.5 × 20 Flat head tapping screw 8pcs Parts included:

Automatic Flush Bolt 2pcs

Assembly screws 1set

#### **Dust Proof Socket**

Material: Stainless Finish/Color: Satin Finish

**Dust Proof Socket** 

Product No.

500-042 Parts included:

Dust Proof Socket 1pcs



#### **Door Selector**

Material: Stainless Finish/Color: Satin Finish

Door Selector Product No.


500-060

Screw included:

4.8 × 35 Flat head tapping screw 3pcs

Parts included: Door Selector 1pcs

Assembly screws 1set



## Box Type Flush Bolt

Material: Stainless Finish/Color: Satin Finish Fire-rated Testing Period: 2 hours

Box Type Hash Bott			
	Product No.	Length(mm)	
	500-080	200	
	500-081	300	
	500-082	600	
	500-083	1,000	
	C !     -	-1 •	

Screw included:


⟨Main unit⟩

4 × 30 Flat head tapping screw 2~3pcs **Strike** 

 $3.5 \times 20$  Flat head tapping screw 2pcs Parts included:

Box Type Flush Bolt 1pcs


Assembly screws 1set

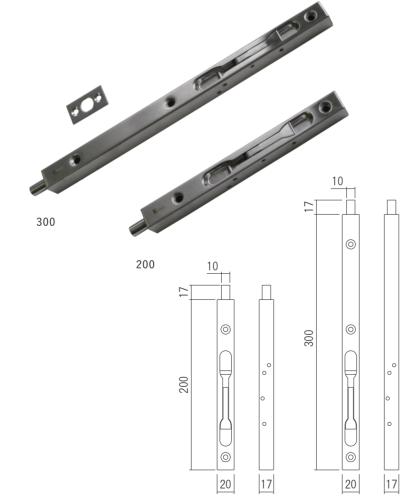




20

8

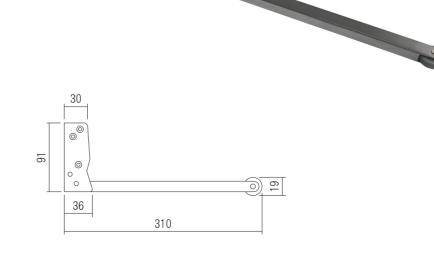



112



### D-Pull Handle


Material: Stainless Finish/Color: Satin Finish

D-Pull Handle Product No. 500-050

Screw included:

3.8 × 25 Flat head tapping screw 6pcs Parts included:

D-Pull Handle 1pcs Assembly screws 1set





## **Cup Ring Handle**

Material: Stainless Finish/Color: Satin finish


Cup Ring Handle Product No.

Screw included:

500-044

 $3.8 \times 16$  Flat head tapping screw 4pcs Parts included:

Cup Ring Handle 2pcs Assembly screws 1set











Material: Stainless Finish/Color: Satin finish

H-Pull Handle Product No. 500-051 Parts included: H-Pull Handle 2pcs Assembly screws 1set Packing 4pcs Allen wrench 1pcs



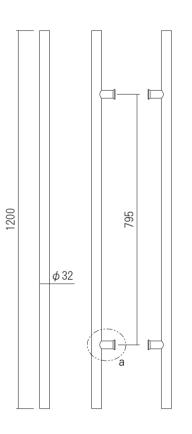



Specification of part a





114