Mortice Locks

Conforming to DIN18251.
Fire-rated period for more than 2 hours, can be used in Fire-rated doors.
Conforming to EN12209:2003/AC2005

Material:〈Mortice〉Steel, Stainless
〈Strike〉Stainless
〈Strike Pocket〉Resin
Back Set:60mm
Durability Testing:500,000 times
Specification: EN12209, DIN18251

Mortice Lock

Product No.	Specification
500-010	Sash lock
500-011	Night latch lock
500-012	Deadlock
500-013	Passage lock
500-014	Privacy lock
500-015	Classroom lock
500-016	Roller lock

Screw included:
4.8×25 Flat head tapping screw 2pcs
4×16 Flat head tapping screw 3pcs
Parts included:
Mortice Lock 1pcs
Assembly screws 1set
Strike 1pcs
Strike Pocket 1pcs

Strike

Sash Lock

Night Latch lock

Deadlock

Passage lock

Privacy lock

Classroom lock

Roller lock

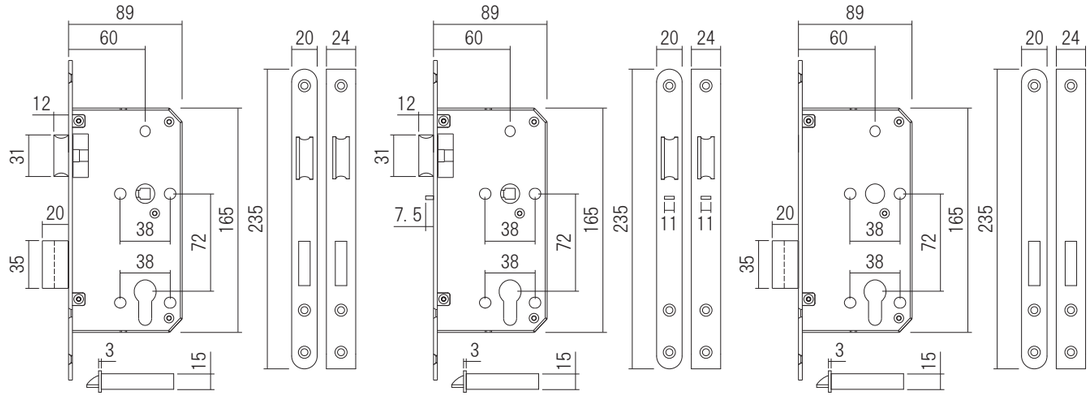

Sash lock　Night Latch lock　Deadlock

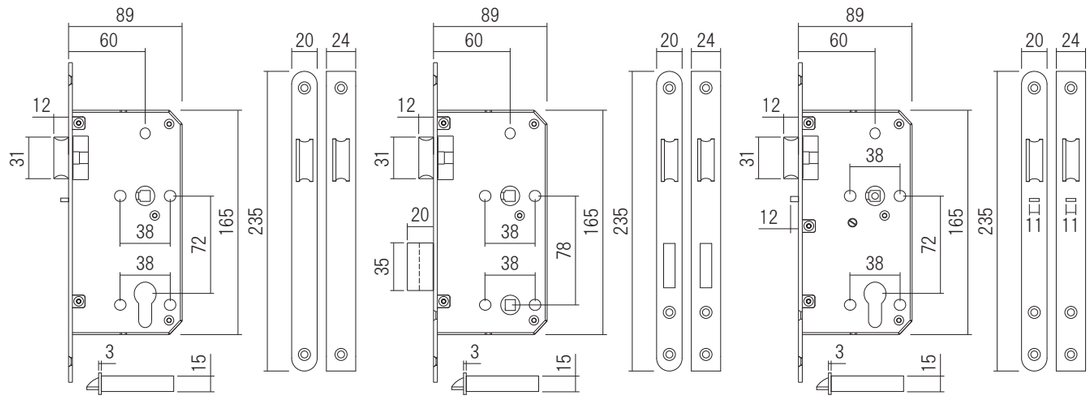

Passage lock　Privacy lock　Classroom lock

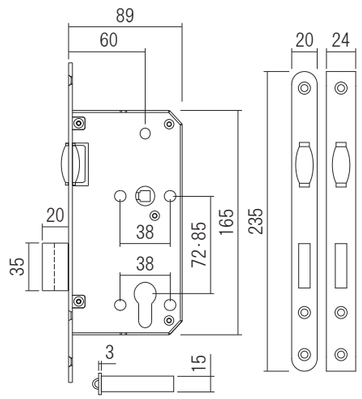

Roller lock

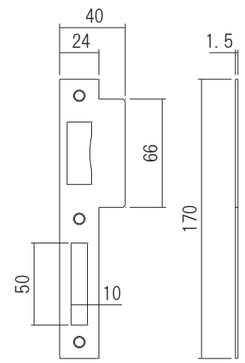

Strike

Sash lock	Latch bolt withdrawn by cylinder key, thumb turn and handle operation from either side of door. (Escape sash lock means dead and latch bolt withrawn simultaneously by inside lever handle.)
Night Latch lock	Cylinder key operation from the outside of the door and handle operation from inside. (Anti-poke night latch means Latchbolt is automatically locked by the anti-poke bolt.)
Deadlock	Deadbolt operated by cylinder key and thumb turn.
Passage lock	Latch bolt withdrawn by handle operation from both sides of door.
Privacy lock	Latch bolt withdrawn by handle operation from both sides of door. Deadbolt operated by a tool and thumb turn.
Classroom lock	Latchbolt operated by internal handle and by cylinder key outside. The external handle is ineffective.
Roller lock	Roller is free, deadbolt is operated by cylinder and thumb turn.