

Clear Cut Hook Lock



This hook lock for indoor sliding doors is good to prevent the door from accidentally being locked. It's impossible to operate the lock unless the door is hitting the trigger part and close perfectly. The product is universal as it can be configured with a standard lever or UD lever with a bigger grip so that everybody can use it easily. UD lever also uses blue and orange indicators, which is easier for anyone to recognize. The cylinder type uses a dimple key that provides 100 combinations, and there are 2 master keys available to generate 126 different child keys combinations. (Please contact us for further details.)

The lock is available in 4 different functions.
The escutcheon is available in round and square types.
The thumb turn is available in standard thumb turn type, standard lever type, and UD lever type.
Available in 6 different colors to guarantee a perfect harmony with the different series of sliding doors.

Material: <Rose>Aluminium
<Lever>ZDC
<Lock Case, Strike>Stainless, Steel
Door Thickness: 30~40mm
Strike Installation Range: Up-Down ± 5mm, Depth 3.5mm

Screw included:
<Rose>
M4 Flat head machine screw(D6) 2pcs
(Refer to the Rose fixing screw / Spindle specification table)
<Lock case>
3.5 × 20 Flat head tapping screw(D7) 2pcs
<Strike>
3.5 × 20 Flat head tapping screw(D7) 2pcs



Round type
Rectangle type
Adjustable Strike
(Bottom Lock)

Bottom Lock BS51
The hook lock strikes out from the bottom.
Back set is 51 mm.



Round type
Rectangle type
Adjustable Strike
(Top Lock)


Top Lock BS38
The hook lock strikes out from above.
Back set is 38 mm.

Top Lock BS51
The hook lock strikes out from above.
Back set is 51 mm.


Dead Bolt Lock BS51
The hook lock strikes out from above.
At the same time, the dead bolt protrudes.
Back set is 51 mm.

Rose fixing screw / Spindle specification table


Indicator, Privaci lock				
Door thickness (mm)	30~34	35~39	40	
Rose fixing screw	Standard, Lever type	M4 × 16	M4 × 25	
	UD Lever type	M4 × 30		
Spindle	L27	L32	L37.5	
Cylinder lock				
Door thickness (mm)	30~35	36~39	40	
Rose fixing screw	Standard, Lever type	M4 × 16	M4 × 25	
	UD Lever type	M4 × 30		
Spindle length (only spindle)	L21(17.8)	L27(23.8)		
Two sides Thumb-turn				
Door thickness (mm)	30~34	35~39	40	
Rose fixing screw	Standard, Lever type	M4 × 10	M4 × 16	M4 × 20
	UD Lever type	M4 × 25	M4 × 30	
Spindle	L27	L32	L37.5	

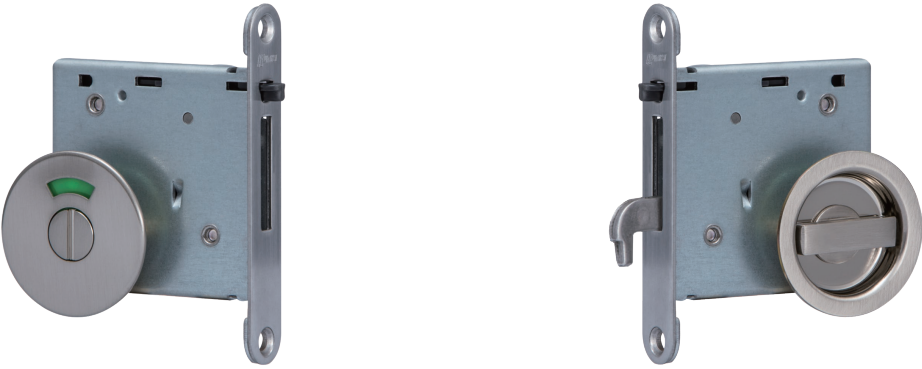


Indicator lock (Outdoor side) Standard type (Indoor side)

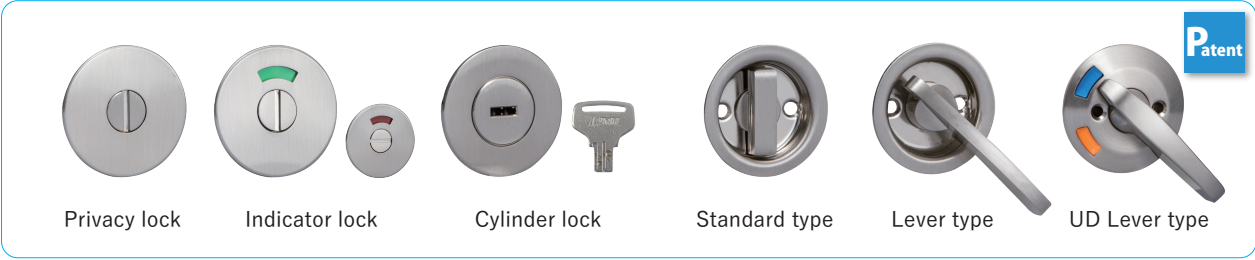


Round Type

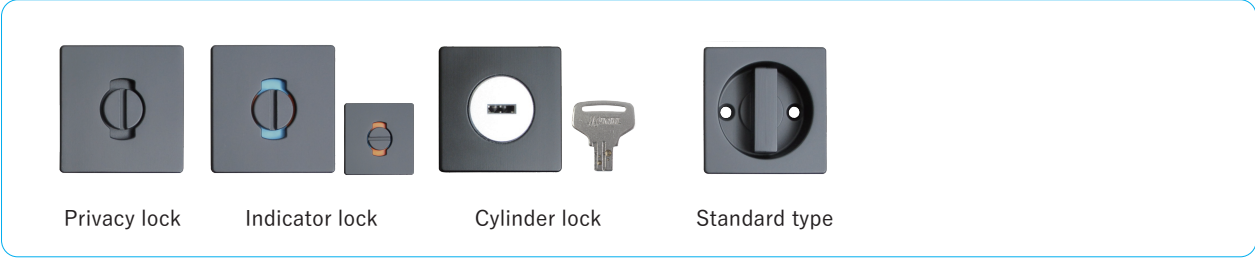

Square Type

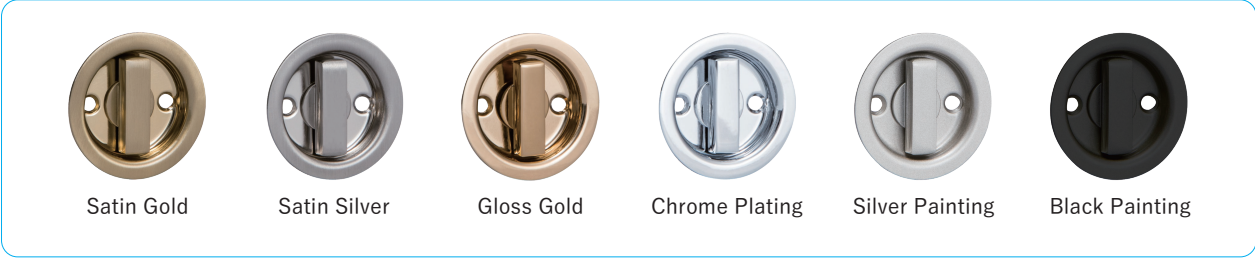

Finish/Color

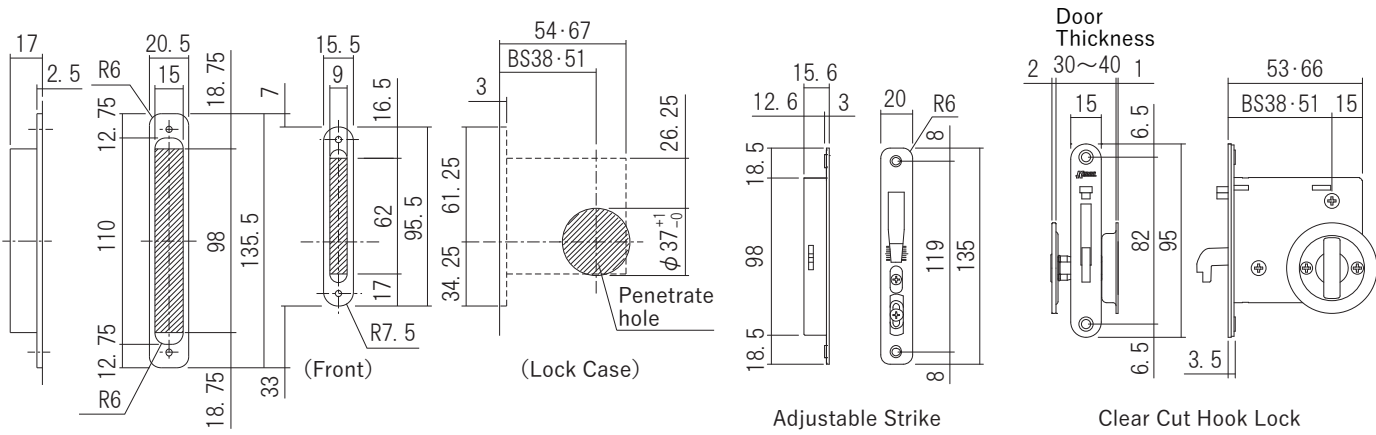

Strike digging drawing Lock case digging drawing

Product No. List

① Lock Case Type		② Rose Type		③ Locks Function		④ Finish Type		⑤ Door Thickness		Locks Function		⑥ Remarks		
				Inside		Outside								
NT51R	Top Lock BS51	R	Round	S	Standard	2	Privacy lock	SG	Satin Gold	04	30~34	Privacy lock, Indicator lock, Double-sided thumb turn	Key No. etc.	
NT38R	Top Lock BS38					3	Indicator lock	SW	Satin Silver	59	35~39			
NU51R	Bottom Lock BS51					S	Standard	PG	Gloss Gold	40	40			
ND51R	Dead Bolt Lock BS51							CR	Chrome Plating	05	30~35			
※Round type faceplate						TS	Silver Painting	69	36~39	Cylinder lock				
						TB	Black Painting	40	40					
						S	Standard	5	Cylinder lock	SG	Satin Gold			
NT51S	Top Lock BS51							6	Master key	SW	Satin Silver			
NT38S	Top Lock BS38									TS	Silver Painting			
NU51S	Bottom Lock BS51							TB	Black Painting					
※Rectangle type faceplate														
				R	Lever	2	Privacy lock	SG	Satin Gold					
						3	Indicator lock	SW	Satin Silver					
						R	Master key	PG	Gloss Gold					
								CR	Chrome Plating					
								TS	Silver Painting					
				R	Lever	5	Cylinder lock	SG	Satin Gold					
						6	Master key	SW	Satin Silver					
				U	UD Lever	3	Indicator lock	TS	Silver Painting					
						5	Cylinder lock							
						6	Master key							
						U	UD Lever							
				S	Standard	2	Privacy lock	SG	Satin Gold					
						3	Indicator lock	SW	Satin Silver					
						5	Cylinder lock	TB	Black Painting					
						6	Master key							
						S	Standard							

Lock Case · Adjustable Strike

Product No.			Product Name
BS38	BS51		
NT38R	NT51R		Top Lock Case (Round type faceplate)
NT38S	NT51S		Top Lock Case (Rectangle type faceplate)
—	NU51R		Bottom Lock Case (Round type faceplate)
—	NU51S		Bottom Lock Case (Rectangle type faceplate)
—	ND51R		Dead Bolt Lock Case (Round type faceplate)
—	ND51S		Dead Bolt Lock Case (Rectangle type faceplate)
224-580	same		Adjustable Strike, Top Lock (Round type faceplate)
900-022	same		Adjustable Strike, Top Lock (Rectangle type faceplate)
—	224-589		Adjustable Strike, Bottom Lock (Round type faceplate)
—	224-590		Adjustable Strike, Bottom Lock (Rectangle type faceplate)


Spare Key

Product No.			Product Name
BS38	BS51		
224-581	same		Spare key (No.000)
224-582	same		Spare key (No.B000)
224-583	same		Spare key (No.D000)



Example on How to Write a Product Number when Ordering

	①	②	③	④	⑤	⑥
Picture A	NT38R	R	S3	SW	04	
Picture B	NT51R	S	S3	TB	04	
Picture C	NU51R	R	S2	SW	04	
Picture D	ND51R	S	S6	TB	05	65

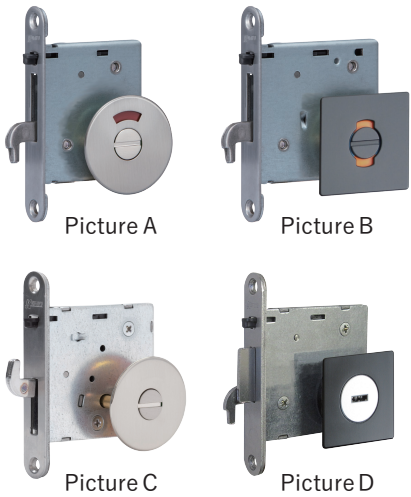

- ※ Cylinder lock comes with 2 keys.
- ※ When specifying the key number, enter the key number in the remarks column.
- ※ The finishing color of the strike plate and faceplate is hairline.
- ※ Master key with master key specifications is sold separately.
- ※ Please contact us about the purchase of master keys.